

# COMPACT 8W/10/12

# Electric scissor lifts

## The Haulotte® advantages

- Compact® 8W and 10 : 990 lb (450 kg) platform capacity
- Compact® 12 : 660 lb (300 kg) platform capacity
- 47 in (1.20 m) width allows operation in the most congested areas
- 5 in (13 cm) ground clearance allows for both inside and outside use
- Pot Hole protection ensures maximum safety
- High operating autonomy
- Robust, reliable and easy to maintain design

## STANDARD FEATURES

- 2 front wheel drive and steer
- Non marking tyres
- 3° tilt alarm
- 2 drive speeds
- 0.92m (3 ft) platform extension
- Load limiter with beep
- Removable control box
- Free wheeling device
- 24V - 4 x 6 V - 240 Ah batteries
- 30A charger
- Battery charge indicator
- Hourmeter
- Horn in cage
- Towing hooks and lifting eyes
- Safety hooks for harness
- Emergency lowering pull handle



## OPTIONS & ACCESSORIES

- Motion alarm
- Electric plug in cage
- Folding guardrails
- Working light
- Flashing light
- Centralised batteries filling
- 1.5m extension from control box
- Motion alarm for movements and translation



DISTRIBUTED BY

**Distributed By**  
**TOWER MARK LIMITED**  
8/F., Honest Motors Building  
9-11 Leighton Road,  
Causeway Bay, Hong Kong.  
(Tel) 2838 9093 (Fax) 2838 9291

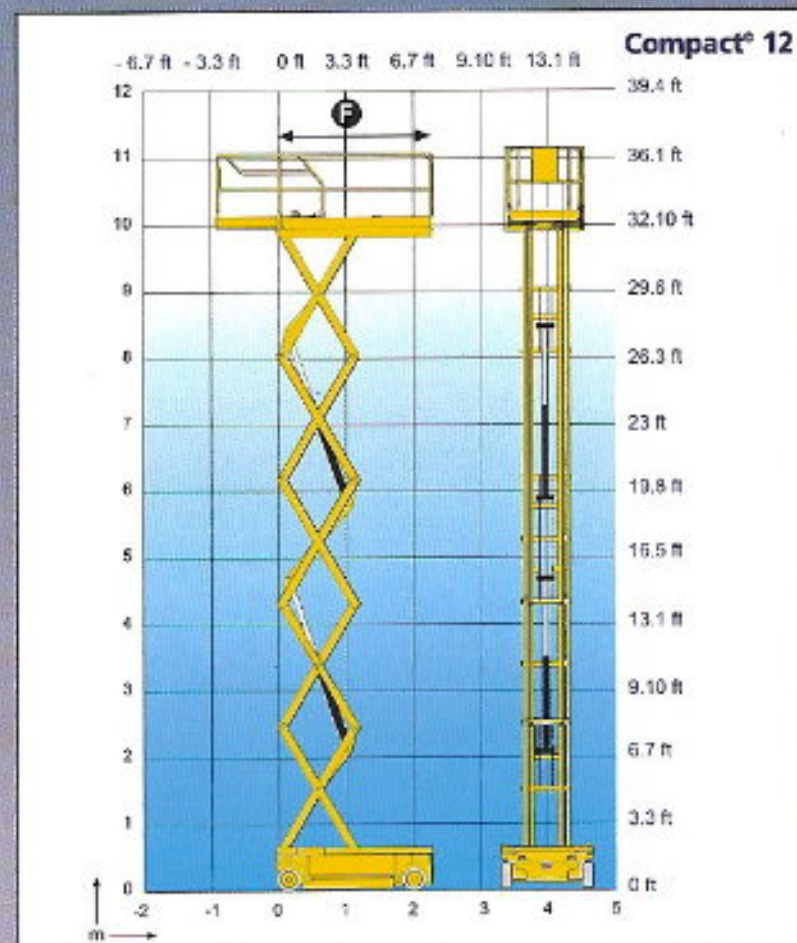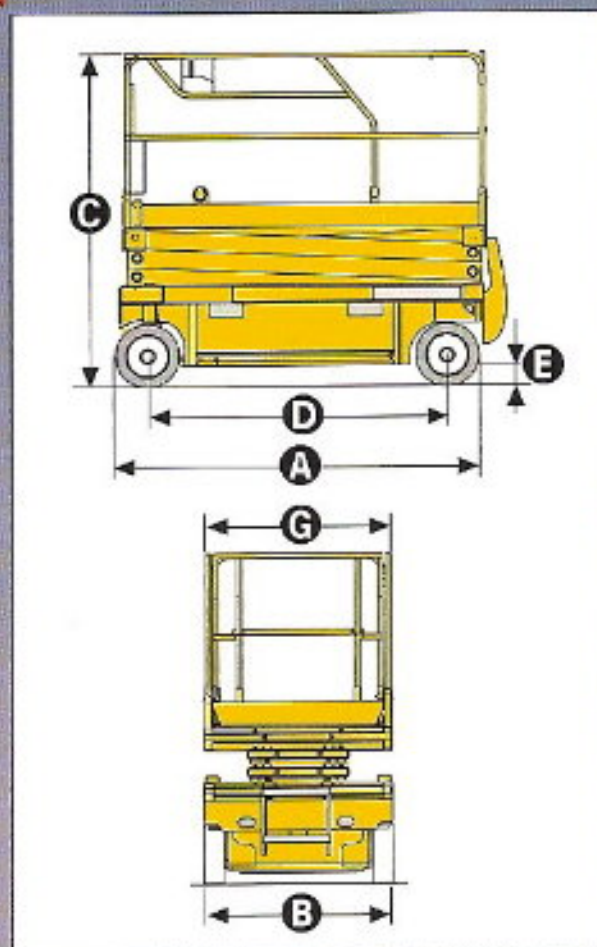

## SPECIFICATIONS

|                                   | Compact 8W            |          | Compact 10         |          | Compact 12 |           |
|-----------------------------------|-----------------------|----------|--------------------|----------|------------|-----------|
| Working height                    | 8,27 m                | 27ft 2in | 10,14 m            | 33ft 3in | 12 m       | 39ft 4in  |
| Platform height                   | 6,27 m                | 20ft 7in | 8,14 m             | 26ft 8in | 10 m       | 32ft 10in |
| Driveable up to                   | 8,27 m                | 27ft 2in | 8,14 m             | 26ft 8in | 8 m        | 26ft 3in  |
| Maximum capacity                  | 450 kg                | 992lb    | 450 kg             | 992lb    | 300 kg     | 661 lb    |
| <b>A</b> Length                   | 2,31 m                | 7ft 7in  | 2,31 m             | 7ft 7in  | 2,31 m     | 7ft 7in   |
| with access steps                 | 2,46 m                | 96in     | 2,46 m             | 96in     | 2,46 m     | 96in      |
| <b>B</b> Width                    | 1,20 m                | 3ft 11in | 1,20 m             | 3ft 11in | 1,20 m     | 3ft 11in  |
| <b>C</b> Height (guardrails)      | 2,14 m                | 7ft      | 2,26 m             | 7ft 5in  | 2,38 m     | 7ft 10in  |
| Height (plat-form)                | 1,02 m                | 3ft 4in  | 1,14 m             | 3ft 9in  | 1,26 m     | 4ft 2in   |
| <b>D</b> Wheelbase                | 1,86 m                | 6ft 1in  | 1,86 m             | 6ft 1in  | 1,86 m     | 6ft 1in   |
| <b>E</b> Ground clearance         | 13 cm                 | 5in      | 13 cm              | 5in      | 13 cm      | 5in       |
| with deployed pot-hole            | 2,5 cm                | 1in      | 2,5 cm             | 1in      | 2,5 cm     | 1in       |
| <b>F</b> x <b>G</b> Platform size | 2.3m x 1.2m           |          | 7ft 6in x 3ft 11in |          |            |           |
| Platform extension                | 0,92 m                | 36in     | 0,92 m             | 36in     | 0,92 m     | 36in      |
| Capacity on extension             | 150 kg                | 331lb    | 150 kg             | 331lb    | 150 kg     | 331lb     |
| Drive speed                       | 1 - 3 km/h            |          | 0.62 - 1.83mph     |          |            |           |
| Inside turning radius             | 0,2 m                 | 78in     | 0,2 m              | 78in     | 0,2 m      | 78in      |
| Outside turning radius            | 2,5 m                 | 8ft 2in  | 2,5 m              | 8ft 2in  | 2,5 m      | 8ft 2in   |
| Raise / lower speed (sec.)        | 44/56                 |          | 51/42              |          | 83/52      |           |
| Maximum gradeability              | 23 %                  |          |                    |          |            |           |
| Tilt alarm                        | 3°                    |          |                    |          |            |           |
| Movements                         | Proportional controls |          |                    |          |            |           |
| Batteries                         | 240 Amp/h             |          |                    |          |            |           |
| Non marking tyres                 | solid 38x13x5cm       |          | solid 15x5x2 in    |          |            |           |
| Weight                            | 1 950 kg              | 4299lb   | 2 330 kg           | 5 136lb  | 2 630 kg   | 5 798lb   |



# Haulotte®