

H 14 TX H 16 TPX

The Haulotte® advantages

- Hydraulic differential lock, standard 4 wheel drive, 15 in (35 cm) ground clearance improve rough terrain capability
- H 16 TPX : improved working area through a positive / negative articulating fly jib with 140° movement (-70° / +70°)
- Continuous 360° turntable rotation
- 180° hydraulic platform rotation
- Compact travel/transport dimensions
- Full proportional controls and simultaneous boom functions improve productivity
- Robust, reliable and easy to maintain design

STANDARD FEATURES

- Deutz diesel engine
- 4 wheel drive and 2 front steering wheels
- 5° tilt alarm
- 12 V electrical control system
- 12 V - 95 Ah - 450 A battery
- Free wheeling device
- Load limiter in cage
- Battery electric emergency control in cage
- Hourmeter
- Slewing block pin
- Towing hooks / lifting eyes
- 2 hooks for safety harnesses in platform
- Horn

OPTIONS & ACCESSORIES



- H 16 TPX: large platform: 7 ft 6 in x 2 ft 7 in (2.3 m x 0.8 m)
- Power line to cage
- Rotating beacon
- Working light
- Motion alarm
- Encoded starting device
- Biodegradable oil
- Catalytic exhaust
- Dual gas/fuel engine
- On-board generator 3 kw
- Hot weather kit
- Cold weather kit



D I S T R I B U T E D B Y

Distributed By
TOWER MARK LIMITED
8/F., Honest Motors Building
9-11 Leighton Road,
Causeway Bay, Hong Kong.
(Tel) 2838 9093 (Fax) 2838 9291

Telescopic booms

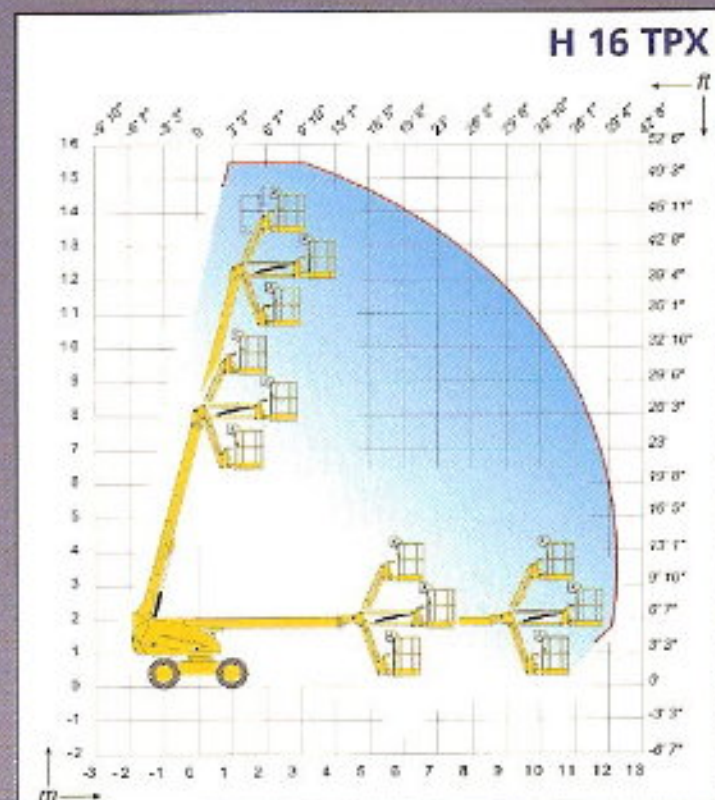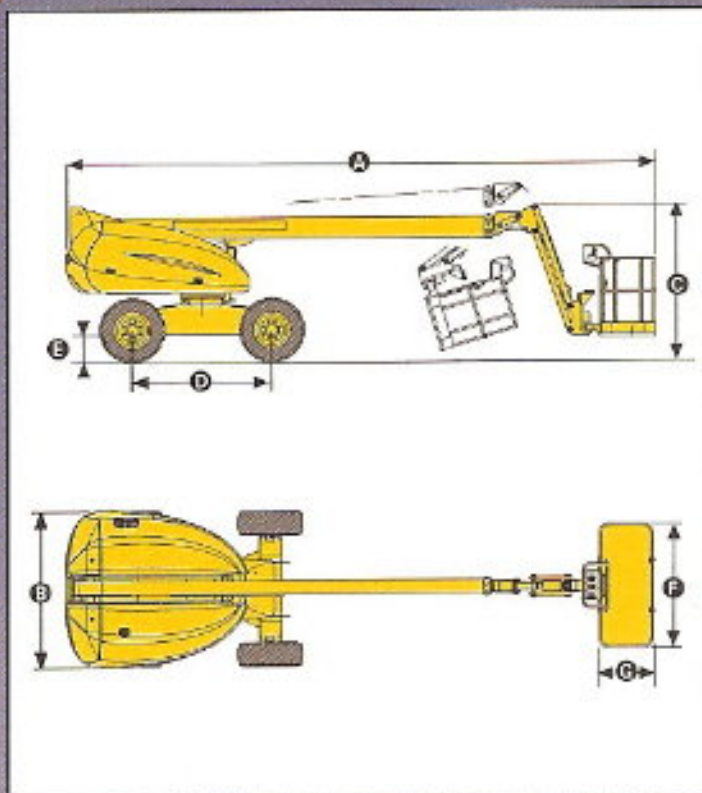

SPECIFICATIONS

	H 14 TX		H 16 TPX	
Working height	14.07 m	46 ft 1 in	15.44 m	50 ft 8 in
Platform height	12.07 m	39 ft 7 in	13.44 m	44 ft 1 in
Horizontal outreach	10.6 m	34 ft 9 in	12.3 m	40 ft 4 in
Platform capacity	230 kg	507 lb	230 kg	507 lb
Fly jib range of motion	n/a	n/a	140° (-70° / +70°)	
Jib length	n/a	n/a	1.5 m	59 in
A Length	7.60 m	24 ft 11 in	8.42 m	27 ft 8 in
B Width	2.3 m	7 ft 6 in	2.3 m	7 ft 6 in
C Stowed height	2.21 m	7 ft 3 in	2.21 m	7 ft 3 in
D Wheelbase	2 m	6 ft 6 in	2 m	6 ft 6 in
E Ground clearance	35 cm	14 in	35 cm	14 in
F x G Platform size	2.3 m x 0.8 m	91 in x 32 in	1.8 m x 0.8 m	71 in x 32 in
Travel/transport length	7.60 m	24 ft 11 in	6.71 m	22 ft
Travel/transport height	2.21 m	7 ft 3 in	2.50 m	8 ft 2 in
Tailswing	0.8 m	32 in	0.8 m	32 in
Drive speed	6 km/h	3.7 mph	6 km/h	3.7 mph
Outside turning radius (wheel)	4.80 m	15 ft 9 in	4.80 m	15 ft 9 in
Turntable rotation - continuous	360°	360°	360°	360°
Hydraulic platform rotation	180°	180°	180°	180°
Engine	Diesel Deutz F 3L 1011 F - 28 kW - 38CV			
Controls	Proportional		Proportional	
Gradeability	50%		50%	
Tyres (Foam Filled)	Sks Hauler - 14 - 17.5		Sks Hauler - 14 - 17.5	
Hydraulic tank	150 l	33 gallons	150 l	33 gallons
Fuel tank	150 l	33 gallons	150 l	33 gallons
Weight	6040 kg	13,315 lb	6600 kg	14,551 lb



Haulotte®