

●主ブーム定格総荷重(ton)/アウトリガ使用時

		アウトリガ最大(6.3m)張出 (全周)				アウトリガ中間(5.1m)張出 (側方)			
ブーム長さ(m) 作業半径(m)		9.3	16.4	23.5	30.6	9.3	16.4	23.5	30.6
2.5	25.00	18.00				25.00	18.00		
3.0	25.00	18.00				25.00	18.00		
3.5	25.00	18.00	11.50			25.00	18.00	11.50	
4.0	23.00	18.00	11.50			23.00	18.00	11.50	
4.5	21.20	18.00	11.50			21.20	18.00	11.50	
5.0	19.40	16.70	11.50	7.00	18.10	16.00	11.50	7.00	
5.5	17.80	15.50	11.50	7.00	15.35	14.60	11.50	7.00	
6.0	16.30	14.40	10.85	7.00	12.90	12.40	10.60	7.00	
6.5	15.10	13.40	10.25	7.00	11.10	10.80	9.90	7.00	
6.8	7.00	12.80	9.90	7.00		9.90	9.40	7.00	
7.0		12.50	9.70	7.00		9.40	9.15	7.00	
7.5		11.70	9.15	7.00		8.20	8.50	7.00	
8.0		10.90	8.70	6.70		7.30	7.80	6.70	
9.0		8.65	7.70	6.15		5.85	6.45	6.05	
10.0		7.05	6.90	5.60		4.75	5.35	5.55	
11.0		5.85	6.25	5.15		3.90	4.50	4.75	
12.0		4.95	5.45	4.70		3.30	3.80	4.10	
13.0		4.20	4.70	4.30		2.75	3.25	3.50	
13.5		3.90	4.40	4.15		2.50	3.00	3.25	
13.9		3.70	4.15	4.05			2.85	3.10	
14.0			4.10	4.00			2.80	3.05	
15.0			3.60	3.70			2.45	2.65	
16.0			3.15	3.45			2.10	2.35	
17.0			2.80	3.05			1.80	2.05	
18.0			2.45	2.70			1.55	1.80	
19.0			2.15	2.45			1.35	1.55	
20.0			1.90	2.20			1.15	1.40	
21.0			1.70	1.95				1.20	
22.0				1.75				1.05	
24.0				1.40				0.75	
26.0				1.15				0.50	
28.0				0.95					
28.1				0.95					
最小ブーム角度	0°	0°	0°	0°	0°	0°	15°	23°	

ブーム長さ(m) 作業半径(m)	アウトリガ中間(3.8m)張出 (側方)				アウトリガ最小張出 (側方) {H型のみ}			
	9.3	16.4	23.5	30.6	9.3	16.4	23.5	30.6
2.5	25.00	18.00			11.10	10.00		
3.0	25.00	18.00			11.10	10.00		
3.5	20.00	18.00	11.50		8.40	8.00	9.30	
4.0	15.70	15.60	11.50		6.70	6.30	7.20	
4.5	12.60	12.60	11.50		5.50	5.10	5.90	
5.0	10.60	10.30	10.25	7.00	4.55	4.20	4.90	5.30
5.5	9.05	8.70	9.00	7.00	3.85	3.50	4.15	4.50
6.0	7.70	7.50	7.80	7.00	3.30	2.95	3.55	3.90
6.5	6.60	6.50	6.85	7.00	2.85	2.45	3.05	3.35
6.8		5.90	6.40	6.65		2.20	2.75	3.05
7.0		5.60	6.10	6.40		2.05	2.60	2.85
7.5		4.90	5.50	5.75		1.70	2.20	2.45
8.0		4.40	4.90	5.15		1.40	1.90	2.10
9.0		3.50	3.95	4.20		0.90	1.40	1.60
10.0		2.80	3.25	3.50			1.05	1.25
11.0		2.25	2.70	2.95				0.95
12.0		1.80	2.25	2.50				
13.0		1.40	1.90	2.15				
13.5		1.20	1.75	2.00				
13.9			1.65	1.90				
14.0			1.60	1.85				
15.0			1.35	1.55				
16.0			1.10	1.35				
17.0			0.95	1.15				
18.0			0.75	1.00				
19.0			0.60	0.85				
20.0				0.70				
21.0								
22.0								
24.0								
26.0						H型アウトリガのみ		
28.0								
28.1								
最小ブーム角度								

●アウトリガ不使用時

	定置づり					
	全周			前方		
ブーム長さ(m) 作業半径(m)	9.3	16.4	23.5	9.3	16.4	23.5
3.0	8.15	7.30		14.00	9.00	
3.5	6.05	5.60	4.50	14.00	9.00	6.50
4.0	4.65	4.40	4.50	12.60	9.00	6.50
4.5	3.65	3.40	3.90	11.25	9.00	6.50
5.0	2.90	2.70	3.35	9.90	8.15	6.50
5.5	2.30	2.10	2.80	8.55	7.35	6.15
6.0	1.80	1.65	2.30	7.20	6.60	5.80
6.5	1.40	1.30	1.90	6.15	5.90	5.45
7.0		1.00	1.60		5.20	5.10
8.0		0.50	1.10		4.00	4.40
9.0			0.70		3.05	3.70
10.0					2.40	3.00
11.0					1.85	2.45
12.0					1.40	2.00
13.0					1.05	1.65
14.0						1.35
15.0						1.10
16.0						0.85
17.0						0.65
最小ブーム角度	20°	53°	62°	0°	22°	36°

	走行づり(2km/h以下)					
	全周			前方		
ブーム長さ(m) 作業半径(m)	9.3	16.4	23.5	9.3	16.4	23.5
3.0	5.90	5.30		10.10	6.50	
3.5	4.40	4.00	3.20	10.10	6.50	4.70
4.0	3.30	3.20	3.20	9.10	6.50	4.70
4.5	2.60	2.40	2.80	8.10	6.50	4.70
5.0	2.10	1.90	2.40	7.10	5.90	4.70
5.5	1.70	1.50	2.00	6.20	5.30	4.40
6.0	1.30	1.20	1.70	5.20	4.80	4.20
6.5	1.00	0.90	1.40	4.40	4.20	3.90
7.0		0.70	1.20		3.70	3.70
8.0			0.80		2.90	3.20
9.0			0.50		2.20	2.70
10.0					1.70	2.20
11.0					1.30	1.80
12.0					1.00	1.40
13.0					0.80	1.20
14.0						1.00
15.0						0.80
16.0						0.60
17.0						0.50
最小ブーム角度	20°	53°	62°	0°	22°	36°

■スカイチルト定格総荷重表

●スカイチルト定格総荷重(ton)/アウトリガ使用時


アウトリガ最大(6.3m)張出 (全周)						
ジブオフセット角度 主ブーム角度(°)	7.5mジブ			12.0mジブ		
	3° ~5°	25°	45°	3° ~5°	25°	45°
80.0	3.00	2.10	1.25	2.00	1.20	1.00
75.0	3.00	2.10	1.25	2.00	1.13	1.00
73.5	3.00	2.10	1.22	1.87	1.11	1.00
71.0	3.00	2.10	1.17	1.70	1.08	0.95
69.0	2.85	2.10	1.13	1.58	1.06	0.91
65.0	2.50	1.80	1.06	1.40	1.01	0.84
60.0	2.10	1.65	1.00	1.20	0.94	0.74
55.0	1.51	1.28	0.95	1.10	0.88	0.64
52.0	1.22	1.08	0.88	0.92	0.84	0.59
50.0	1.05	0.95	0.83	0.82	0.74	0.54
48.0	0.91	0.82	0.78	0.72	0.65	0.51
45.0	0.74	0.66	0.70	0.59	0.53	0.45
40.0	0.50	0.44		0.44	0.38	
37.0	0.39	0.32				
35.0	0.32					
最小ブーム角度						

アウトリガ中間(5.1m)張出 (側方)						
ジブオフセット角度 主ブーム角度(°)	7.5mジブ			12.0mジブ		
	3° ~5°	25°	45°	3° ~5°	25°	45°
80.0	3.00	2.10	1.25	2.00	1.20	1.00
75.0	3.00	2.10	1.25	2.00	1.15	1.00
73.5	3.00	2.10	1.22	1.86	1.12	1.00
72.0	3.00	2.10	1.17	1.75	1.10	0.97
71.0	2.84	2.10	1.15	1.70	1.09	0.95
70.0	2.67	2.10	1.13	1.62	1.08	0.93
69.0	2.52	2.00	1.10	1.55	1.06	0.91
65.0	1.95	1.60	1.03	1.40	1.01	0.84
63.0	1.70	1.42	0.98	1.23	0.99	0.81
60.0	1.34	1.15	0.92	1.02	0.82	0.75
55.0	0.86	0.76	0.70	0.69	0.56	0.52
52.0	0.63	0.56	0.56	0.52	0.42	0.40
50.0	0.50	0.45	0.45	0.40	0.35	
49.0	0.45	0.40	0.40			
最小ブーム角度						

	アウトリガ中間(3.8m)張出 (側方)					
	7.5mジブ			12.0mジブ		
ジブオフセット角度 主ブーム角度(°)	3° ~5°	25°	45°	3° ~5°	25°	45°
80.0	3.00	2.10	1.25	2.00	1.20	1.00
75.0	3.00	2.10	1.25	2.00	1.15	1.00
73.5	2.60	1.94	1.21	1.82	1.13	1.00
71.0	2.00	1.61	1.14	1.52	1.10	0.90
69.0	1.60	1.36	1.00	1.27	0.94	0.80
65.0	1.00	0.88	0.75	0.83	0.66	0.57
60.0	0.52	0.48	0.47	0.45	0.35	0.33
最小ブーム角度						

■作業範囲図

(注) 本図はブームおよびジブのたわみを含んでいません。

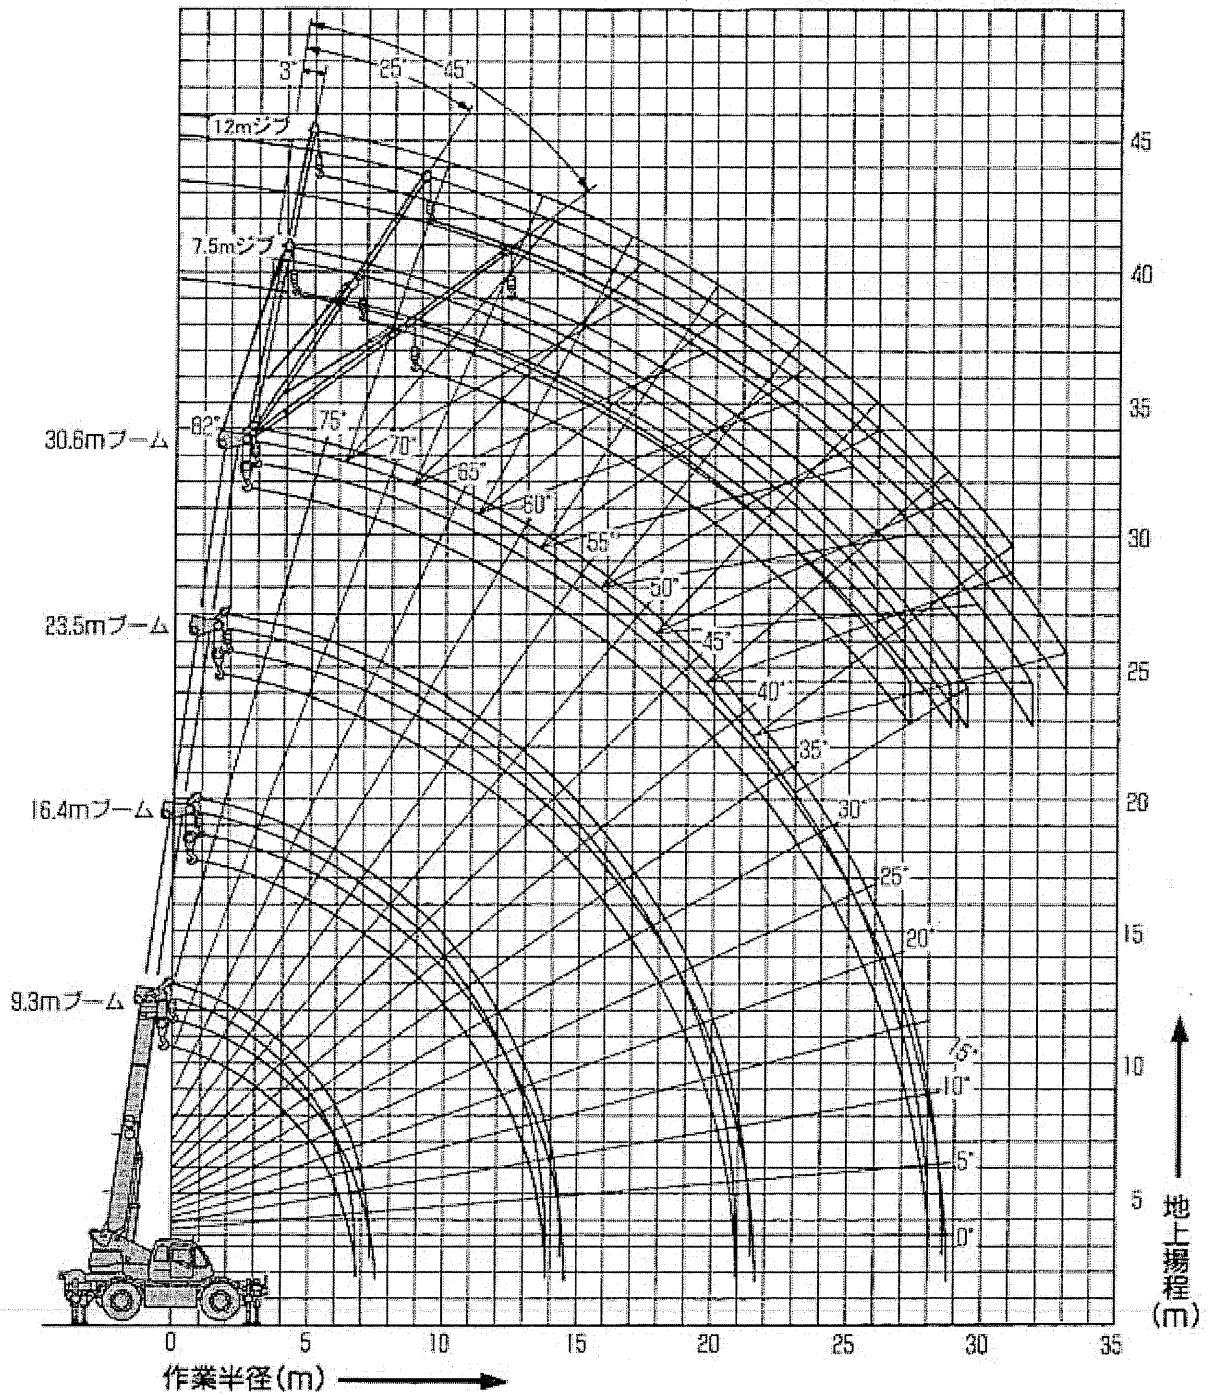

- (注) 1. 上図は、ブームのたわみを含んでおりません。
 2. 上図は、アウトリガ最大張出時(全周)のものです。

ラフター・クレーン 25Ton吊

主要緒元

KOBELCO RK250-3

